

**Little
Giant**
Ladder Systems

LITTLEGIANTLADDERS.COM

CANADIAN CATALOG



A low-angle photograph of a construction worker in an orange safety vest and blue jeans standing on a green Little Giant telescopic ladder. The ladder is extended high up against the side of a building with vertical corrugated metal siding. The worker is positioned near the top of the ladder, reaching towards the roofline. The sky is blue with some light clouds. The ladder has 'Little Giant' and 'TELECOMBO' printed on it in red and black.

PREVENTING INJURIES, SAVING LIVES™

LITTLE GIANT HAS TAKEN THE NEXT STEP IN CLIMBING EQUIPMENT SAFETY BY CREATING PRODUCTS ENGINEERED TO PROTECT YOU. WE DESIGN TO ACCOUNT FOR HUMAN BEHAVIOR. YOUR SAFETY IS OUR OBSESSION.

Every day at least 2,000 people are injured while using a ladder. Over 100 of them suffer a long-term injury or even permanent disability. Every day one person dies, never returning home to their family.

This fundamental purpose drives Little Giant Ladder Systems® to be the safety and innovation leader in climbing systems and professional access equipment. We have partnered with safety professionals all over the world to develop real solutions to real safety problems.

HYPERLITE[®]

375 LBS RATED | TYPE IAA | 300 LBS RATED | TYPE IA | CSA + ANSI COMPLIANT*

1. DOUBLE-PULLEY SYSTEM

2. WALL PAD FEET & V-BAR

3. CLAW[®] FASTENING SYSTEM

4. RUB STRIPS

5. LIGHTWEIGHT FIBERGLASS
6. BUBBLE LEVELS (2)

7. HI-VIZ GREEN

8. FLAT RUNGS

9. SURE-SET[™] FEET



CLAW[®] FASTENING SYSTEM & WALL PADS

Optional add-on: Clamp the ladder to a strand or anchor points. Non-marking wall pads (IAA versions)




GROUND CUE[®]

An audible “click” on the bottom rung alerts you when you have reached on the bottom rung of the ladder.
(Select IAA models only)



Demo Video

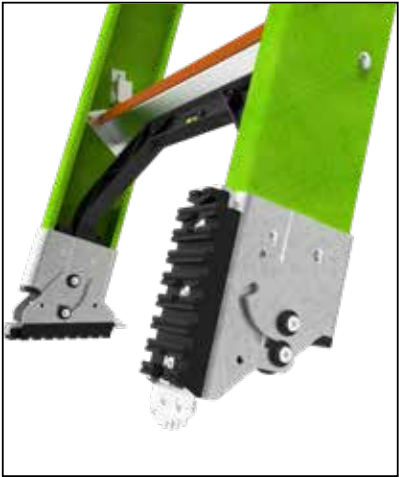

SURE-SET[™] FEET

Securely stays in place, swivels for use in the spike foot position.
(Select IAA models only)



RATCHET LEVELER



WIND BAR

PART NUMBER	DESCRIPTION	HIGHEST STANDING LEVEL	MAX REACH*	TRIANGLE RUNG WIDTH	STORAGE HEIGHT	STORAGE WIDTH	WEIGHT
 17516-303V	16' - CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Rub Strips, Cable Hooks, CLAW, V-bar and SURE-SET Feet	9' 4"	15' 10"	1"	8' 7"	1' 6"	35 lbs
 17520-303V	20' CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar and SURE-SET Feet	13' 3"	19' 9"	1"	10' 7"	1' 6"	42 lbs
 17520-392V	20' CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW, V-bar, center Pulley and SURE-SET Feet	13' 3"	19' 9"	1"	10' 7"	1' 6"	45 lbs
 18328-303V	28' CSA Grade IA - 300 lb/136 kg Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW and V-bar	20' 10"	27' 4"	1"	14' 6"	1' 6"	52 lbs
 17528-303V	28' CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar and SURE-SET Feet	20' 11"	27' 5"	1"	14' 7"	1' 6"	56 lbs
 17528-393V	28' CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW, V-bar, center Pulley and wind bar	20' 11"	27' 5"	1"	14' 7"	1' 6"	58 lbs
 17528-394V	28' CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW, V-bar, center Pulley and RATCHET Levelers	21' 1"	27' 7"	1"	14' 9"	1' 6"	69 lbs
 17532-393V	32' CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW, V-bar, center Pulley and wind bar	24' 8"	31' 2"	1"	16' 6"	1' 6"	69 lbs
 17532-394V	32' CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW, V-bar, center Pulley and RATCHET Levelers	24' 11"	31' 5"	1"	16' 9"	1' 6"	75 lbs
 17336-303V	36' CSA Grade IA - 300 lb/136 kg Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW and V-bar	27' 7"	34' 1"	1"	18' 6"	1' 6"	73 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH
COMPLIES WITH ALL CSA, ANSI A14 STRENGTH AND TESTING STANDARDS. RUNG/STEP SPACING COMPLIES TO CSA AND INT'L STANDARDS. CSA 1910.23, CSA 1926.10.53, CSA Z11, EN131-1, AS/NZS 1892.2.6.2

SUMOSTANCE®



Demo Video

375 LBS RATED | TYPE IAA | CSA + ANSI COMPLIANT*

1. NON-MARKING WALL PAD FEET

2. DOUBLE-PULLEY SYSTEM

3. RUB STRIPS

4. LIGHTWEIGHT FIBERGLASS

5. BUBBLE LEVELS
6. HI-VIZ GREEN

7. GROUND CUE®

8. WIDE-STANCE LEVELERS

9. SURE-SET™ FEET



WIDE-STANCE LEVELING & OUTRIGGING

When fully opened, the SumoStance outriggers provide 9" of leveling adjustment and expand 37", increasing side-tip stability up to 600%.



CLAW® FASTENING SYSTEM & WALL PADS

Optional add-on: Clamp the ladder to the strand or anchor points. Non-marking wall pads (IAA versions)



PROVIDES EXTRA STABILITY, ESPECIALLY ON 32', 36' AND 40' LADDERS

PART NUMBER	DESCRIPTION	HIGHEST STANDING LEVEL	MAX REACH*	TRIANGLE RUNG WIDTH	STORAGE HEIGHT	STORAGE WIDTH	WEIGHT
17216-303	16' - CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Rub Strips and SURE-SET Feet	9' 9"	16' 3"	1.5"	8" 9"	1' 10"	38 lbs
17220-303	20' - CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Rub Strips and SURE-SET Feet	13' 4"	20'	1.5"	10' 9"	1' 10"	46 lbs
17620-303V	20' - CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Rub Strips, Cable Hooks, CLAW, V-bar and SURE-SET Feet	13' 6"	20'	1.5"	10' 9"	1' 10"	49 lbs
17224-303	24' - CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Rub Strips and SURE-SET Feet	17' 4"	23' 10"	1.5"	12' 9"	1' 10"	52 lbs
17224-386	24' - CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Rub Strips, V-Rung and SURE-SET Feet	17' 4"	23' 10"	1.5"	12' 9"	1' 10"	52 lbs
17624-303V	24' - CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Rub Strips, Cable Hooks, CLAW, V-bar and SURE-SET Feet	17' 4"	23' 10"	1.5"	12' 9"	1' 10"	56 lbs
17228-303	28' - CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Rub Strips and SURE-SET Feet	21' 2"	27' 8"	1.5"	14' 8"	1' 10"	59 lbs
17228-386	28' - CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Rub Strips, V-Rung and SURE-SET Feet	21' 2"	27' 8"	1.5"	14' 8"	1' 10"	59 lbs
17628-303	28' - CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Rub Strips, Cable Hooks, CLAW, Pole Strap and SURE-SET Feet	21' 2"	27' 8"	1.5"	14' 8"	1' 10"	62 lbs
17628-303V	28' - CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Rub Strips, Cable Hooks, CLAW, V-bar and SURE-SET Feet	21' 2"	27' 8"	1.5"	14' 8"	1' 10"	62 lbs
17232-303	32' - CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Rub Strips and SURE-SET Feet	25'	31' 6"	1.5"	16' 8"	1' 10"	73 lbs
17632-303V	32' - CSA Grade IAA - 375 lb/170 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Rub Strips, Cable Hooks, CLAW, V-bar and SURE-SET Feet	25'	31' 6"	1.5"	16' 8"	1' 10"	76 lbs
17436-303V	36' - CSA Grade IA - 300 lb/136 kg Rated, Fiberglass Extension Ladder with GROUND CUE, Rub Strips, Cable Hooks, CLAW and Pole Strap	27' 10"	34' 10"	1.5"	18' 8"	1' 10"	81 lbs
17840-303	40' - CSA Grade IA - 300 lb/136 kg Rated - Fiberglass Extension Ladder with GROUND CUE and Rub Strips	30' 8"	37' 2"	1.5"	20' 7"	1' 10"	81 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH
** ADD V TO THE END OF THE PART NUMBER TO REPLACE THE POLE STRAP WITH A V-BAR
COMPLIES WITH ALL CSA, ANSI A14 STRENGTH AND TESTING STANDARDS. RUNG/STEP
SPACING COMPLIES TO CSA AND INT'L STANDARDS. CSA 1910.23, CSA 1926.10.53, CSA Z11,
EN131-1, AS/NZS 1892.2.6.2

LIMITED ARREST SYSTEM

FOR HYPERLITE AND SUMOSTANCE LADDERS



Demo Video

CONFIDENCE + SAFETY IN CLIMBING

The Limited Arrest is an integrated rope system that when harnessed in, keeps the user safely secured to their lifeline rope.

We partnered with Petzl®, the #1 climbing company in the world, to create this state-of-the art system to make sure you go home to your family safe.



SECURE TO STRAND OR POLE FOR ENHANCED PROTECTION

For Strand and Pole use only. Not designed for building or home use.



PRODUCT	PART NUMBER	DESCRIPTION	WEIGHT
Sumostance	17624-247	24' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and SURE-SET Feet - To be used with PETZL ASAP Kit	56 lbs
Sumostance	17624-279	24' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and SURE-SET Feet - To be used with PETZL ASAP Kit	59 lbs
Sumostance	17628-279	28' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and SURE-SET Feet - To be used with PETZL ASAP Kit	68.4 lbs
HyperLite	17524-279	24' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and SURE-SET Feet - To be used with PETZL ASAP Kit	53 lbs
HyperLite	17524-282	24' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and RATCHET Levelers - To be used with PETZL ASAP Kit	61 lbs
HyperLite	17524-285	24' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and auto-levelers - To be used with PETZL ASAP Kit	48 lbs
HyperLite	17524-247	24' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and SURE-SET Feet - To be used with PETZL ASAP Kit	48 lbs
HyperLite	17528-279	28' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and SURE-SET Feet - To be used with PETZL ASAP Kit	54 lbs
HyperLite	17528-282	28' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and auto-levelers - To be used with PETZL ASAP Kit	54 lbs
HyperLite	17528-275	28' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and AUTO-LEVELERS - To be used with PETZL ASAP Kit	54 lbs
HyperLite	17528-267	28' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and RATCHET Levelers - To be used with PETZL ASAP Kit	54 lbs
HyperLite	17528-247	28' - ANSI Type IAA - 375 lb Rated, Fiberglass Extension Ladder with GROUND CUE, Cable Hooks, CLAW, V-bar, Limited Arrest System Safety Line and SURE-SET Feet - To be used with PETZL ASAP Kit	54 lbs
Petzl Accessory Kit	11750	ASAP Ascender and 'Sorber (Carabiners included on all ASAP kits)	2.16 lbs
Petzl Accessory Kit + Bag	11751	ASAP Ascender and 'Sorber including top and bottom bags with stabalizer straps for pole use on Hyperlite	5.5 lbs
Petzl Accessory Kit + Bag	11752	ASAP Ascender and 'Sorber including top bag with stabalizer straps for pole use on Sumostance	3.8 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH
Harness not included
Complies with all CSA, ANSI A14 strength and testing standards. Rung/step spacing complies to CSA and Int'l Standards.*
*CSA 1910.23, CSA 1926.10.53, CSA Z11, EN131-1, AS/NZS 1892.2.6.2

TECHNICAL
KING KOMBO®



Demo Video

375 LBS RATED | TYPE IAA | CSA + ANSI COMPLIANT

1. ROTATING WALL PAD

2. 3" WIDE STEPS

3. GROUND CUE®

4. NON-CONDUCTIVE RAILS
5. FLOATING RAIL BRACE

6. FUNCTIONAL REAR SECTION

7. V-BAR

8. WALL PAD FEET

The King Kombo Technical model has all the bells and whistles. The Technical Sure-Set Feet, Ground Cue and versatile V-Rung set it apart from other King Kombo models.



SURE SET FEET



GET CLOSER TO YOUR WORK

ROTATING WALL PAD / V-BAR



INSIDE CORNER

OUTSIDE CORNER

FLAT WALL

POLE



LEANING



STEPLADDER



EXTENSION

PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	STEPLADDER MAX REACH*	EXTENSION HIGHEST STANDING LEVEL	EXTENSION MAX REACH*	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
13906-374	6'	3' 9"	10' 3"	6' 7"	13' 1"	2' 4"	7"	28.5 lbs
13712-374**	7'	4' 8"	11' 2"	8' 9"	15' 3"	2' 4"	7"	27 lbs
13908-374	8'	5' 8"	12' 2"	10' 4"	17' 2"	2' 4"	7"	35.5 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH
**13712-374 HAS A 1.0 PALM BUTTON HINGE AND NOT COMPATIBLE WITH LITTLE GIANT® ACCESSORIES

INDUSTRIAL
KING KOMBO®

375 LBS RATED | TYPE IAA | CSA + ANSI COMPLIANT



Demo Video



QUAD POD



4' INDUSTRIAL MODEL
Differs from other sizes with a palm-button hinge and modified V-bar, rather than a Grip-N-Go hinge and Quad Pod.



It's the pro tool that helps you get stuff done faster than ever. The pinnacle of ladder technology, the King Kombo™ from Little Giant Ladder Systems® is tough as nails and versatile enough for any tradesperson. Recognized for its superior safety and innovation, the King Kombo is the most awarded ladder ever, having received awards at the 2019 Pro Tool Innovation Awards, 2019 OH&S New Product of the Year Awards, SAFE Awards from the National Association of Homebuilders and more.



INSIDE CORNER OUTSIDE CORNER FLAT WALL 2X4 STUD

1. ROTATING WALL PAD

Two different positions for leaning on inside corners, outside corners, walls and 2x4 studs.

2. ONE-HANDED GRIP-N-GO™ HINGE

New easy-to-use hinge allows smooth transition from storage to a-frame to extension positions.

3. GROUND CUE®

Newly redesigned for improved performance. Provides an audible “click” on bottom step that alerts you when you have reached the bottom step of the ladder.

4. RAIL GUARD

Shock-absorbing braces increase ladder lifespan by protecting it during daily use.

5. NON-CONDUCTIVE RAILS

Non-conductive fiberglass rails rated to hold up to 375 lbs.

6. FUNCTIONAL REAR SECTION

At 14” on center, access tight workspaces between wall studs, ceiling trusses and roof or attic access ports.

7. QUAD POD™

For use in the extension position, the Quad Pod™ allows the ladder to be leaned on inside and outside corners, walls, poles and 2x4 studs. Also serves as a tool tray.

DID YOU KNOW?

The King Kombo’s legs are wide for stability on the climbing side and narrow on the extension side for ease of access through studs and attic access ports.

PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	STEPLADDER MAX REACH*	EXTENSION HIGHEST STANDING LEVEL	EXTENSION MAX REACH*	SPREAD	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
13470-071**	4'	1' 11"	3' 9"	6' 11"	10' 3"	1' 3"	1' 9"	7"	21 lbs
13905-373	5'-8'	2' 10"	9' 4"	4' 10"	11' 4"	3' 0"	2' 0.5"	7"	24 lbs
13906-373	6'-10'	3' 9"	10' 3"	6' 7"	13' 1"	3' 8"	2' 1"	7"	27 lbs
13908-373	8'-14'	5' 8"	12' 2"	10' 8"	17' 2"	4' 11"	2' 4"	7"	34 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH
** 13470-071 HAS 1.0 PALM BUTTON HINGE AND V-BAR

PROFESSIONAL
KING KOMBO®



Demo Video

375 LBS RATED | TYPE IAA | CSA + ANSI COMPLIANT

1. ROTATING WALL PAD
2. ONE-HANDED GRIP-N-GO HINGE
3. NON-CONDUCTIVE FIBERGLASS
4. THIN PROFILE FOR USER MOBILITY
5. INCREASED SIDE-TIP STABILTY



LEANS ON ALMOST ANYTHING
The rotating wall pad helps adjust to inside and outside corners, flat walls and poles.



EXTENSION
Quickly adjusts to an extension ladder so you always have the ladder you need.



PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	STEPLADDER MAX REACH*	EXTENSION HIGHEST STANDING LEVEL	EXTENSION MAX REACH*	STORAGE WIDTH	SPREAD	WEIGHT
13905-303	5'	2' 10"	9' 4"	4' 10"	11' 4"	2'	3'	19 lbs
13906-303	6'	3' 9"	10' 3"	6' 7"	13' 1"	2' 1"	3' 8"	23 lbs
13908-303	8'	5' 8"	12' 2"	10' 4"	17' 2"	2' 4"	4' 11"	31 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

KING KOMBO® XT



Demo Video

375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

1. ROTATING WALL PAD
2. ONE-HANDED GRIP-N-GO HINGE
3. NON-CONDUCTIVE FIBERGLASS
4. EXTENDABLE REAR SECTION
5. GROUND CUE®
6. V-BAR
7. FIELD-REPLACEABLE FEET



LEANS ON ALMOST ANYTHING
The rotating wall pad helps adjust to inside and outside corners, flat walls and poles.



EXTENSION
Quickly adjusts to an extension ladder so you always have the ladder you need.



EXTEND TO FIT THE TERRAIN
Three feet of added extension with parallel rails means you never have to worry you ladder is too small, it just extends.



PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	STEPLADDER MAX REACH*	EXTENSION HIGHEST STANDING LEVEL	EXTENSION MAX REACH*	STORAGE WIDTH AT BASE	STORAGE DEPTH	WEIGHT
13963-071	6	3' 9"	10' 3"	2' 10" - 9' 5"	15' 11"	2' 1"	8"	35.5 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

SENTINEL®

375 LBS RATED | TYPE IAA | CSA + ANSI COMPLIANT



Demo Video



RAIL LOCKS
Keep the Sentinel's rails locked securely together while in the leaning position, storage and transit.



Sometimes, you need to get closer to the task at-hand than a standard A-frame offers, and that's where the Sentinel™ comes in. The Little Giant® Sentinel combines two ladders—an A-frame and leaning—into one, making it a versatile tool to help you get stuff done with confidence. Available in 10' and 12' models, the Sentinel is a Type IAA ladder rated to hold up to 375 lbs. This ladder meets or exceeds all CSA and ANSI standards.



INSIDE CORNER



OUTSIDE CORNER



FLAT WALL



2X4 STUD

1. ROTATING WALL PAD

The Sentinel features a rotating wall pad that allows you to safely work on inside corners, outside corners, walls and studs. With its non-marring surface, you can lean your ladder to get closer to your work without fear of damaging the surface you're working on.

2. EXTRA WIDE COMFORT STEPS

At 3.12" wide, the steps on the Sentinel are already comfortable, but the top two standing steps are where the Sentinel really shines. The top steps are set at 6.25" for maximum foot comfort.

3. NON-CONDUCTIVE FIBERGLASS RAILS

Our Hi-Viz Green fiberglass is lightweight and non-conductive. The vibrant green color is proven to increase visibility, preventing injuries from people or objects bumping the ladder while it's in use. The Sentinel is a great all-around ladder for tasks at home and on the go.

4. RAIL LOCKS

Keep rails together while in leaning position, storage and transit.

5. GROUND CUE®

Many injuries occur when descending and missing the last step of the ladder. On the bottom step of the ladder, the Ground Cue® makes an audible "click," alerting you that you've reached the ground safely.

DID YOU KNOW?

The Sentinel is CSA compliant as a stepladder and leaning ladder.

PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	STEPLADDER MAX REACH*	SPREAD	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
15910-303	10'	7' 8"	14' 2"	5' 4"	2' 2"	7"	40 lbs
15912-303	12'	9' 7"	16' 1"	6' 3"	2' 4"	7"	48 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

TELECOMBO™

375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT



Demo Video

- 1. WALL PAD**
Large full width, non-marring pad for added stability. Works on flat walls, corners, poles and studs.
- 2. QUICK-LATCH™ HINGE**
For safe transition from extension to stepladder.
- 3. BUBBLE LEVEL**
Helps ensure you always climb at the correct incline angle.
- 4. GROUND CUE®**
Makes an audible click when you have reached the final step.
- 5. WIDE FLARE FEET**
For more stability while climbing the rear section while in the stepladder position .
- 6. REAR SECTION**
Functional Rear section has quick and simple adjustment to extension position.



The Telecombo was designed to make technician’s jobs safer and easier.

The Quick-Latch™ hinge allows users to quickly verify that the hinge is engaged and safe to climb. Designed with a contouring grey non-marring wall pad that spans the width of the ladder for better weight dispersal and reduced wall damage.

Equipped with wide flare feet on the functional rear section to give added stability when climbing from either side of the ladder.

The ladder is equipped with Sure-Set feet that can be used in the pad or spiked foot position outside providing additional safety while climbing.

The non-conductive fiberglass 3-IN-1 Telecombo gives you the versatility of an A-Frame, leaning, and extension ladder, all in one.



QUICK-LATCH™ HINGE
For safe transition from extension to stepladder.

PART NUMBER	MODEL	STEPLADDER MAX REACH*	EXTENSION MAX REACH*	STORAGE WIDTH	WEIGHT
13946-001	6’	10’ 3”	12’ 1”	2’ 1”	35 lbs
13947-001	7’	11’ 2”	14’	2’ 4”	40.3 lbs
13948-001	8’	12’ 2”	15’ 10”	2’ 4”	43.5 lbs

* A 5’ 6” PERSON WITH A 12” VERTICAL REACH

CONQUEST™



Demo Video

TYPE IA - 300 LBS RATED | TYPE IAA - 375 LBS RATED | CSA + ANSI COMPLIANT

1. MULTI-POSITION HINGES

2. RAPID LOCK®

3. AIR DECK™ ACCESSORY PORTS

4. NON-CONDUCTIVE FIBERGLASS
5. STRAIGHT LEGS TO ACCESS TIGHT SPACES

6. V-BAR

7. BEVELED CORNER FEET

8. HANDLE AND WHEELS FOR EASY TRANSPORT



STAIRCASES

Adjust the sides of the ladder independently to work safely on stairs or other uneven surfaces.

EXTENSION

Compact body can be configured into a large extension ladder.



V-BAR

Optional add on: Non-marking, heavy duty V-bar grips poles and conforms to outside corners.

PART NUMBER	MODEL	DUTY RATING	MAX REACH*	STEPLADDER SIZE MIN-MAX	EXTENSION SIZE MIN-MAX	EXT. HIGHEST STANDING LEVEL MIN-MAX	STORAGE HEIGHT	STORAGE DEPTH	WEIGHT
17113-001	13	IAA - 375 lbs	14' 3"	3' 6" - 5' 6"	3' 10" - 7' 9"	6' 11" - 10' 11"	3' 7"	10"	32 lbs
17117-303	17	IA - 300 lbs	18' 1"	4' 6" - 7' 6"	9' - 15'	5' 9" - 11' 7"	4' 7"	10"	37.5 lbs
17122-303	22	IA - 300 lbs	22'	5' 6" - 9' 6"	11' - 19'	7' 10" - 15' 6"	5' 7"	10"	46 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

CONQUEST™ ALL-TERRAIN



Demo Video

300 LBS RATED | TYPE IA | CSA + ANSI COMPLIANT

1. MULTI-POSITION HINGES

2. RAPID LOCK®

3. AIR DECK™ ACCESSORY PORTS

4. NON-CONDUCTIVE FIBERGLASS
5. ADJUSTABLE OUTRIGGERS

6. V-BAR

7. INNOVATIVE FEET

8. HANDLE AND WHEELS FOR EASY TRANSPORT



ADJUSTABILITY FOR UNEVEN TERRAIN

Equipped with adjustable outriggers that add side-tip stability and leg-leveling capability, so you can work safely on even the toughest terrain.



EASILY LEANS ON POLES & CORNERS

The V-bar and innovative feet on the extension side of the ladder allows for easy setup on inside and outside corners, walls and poles.

PART NUMBER	MODEL	STEPLADDER SIZE MIN-MAX	EXTENSION SIZE MIN-MAX	EXTENSION HIGHEST STANDING LEVEL	STORAGE HEIGHT	STORAGE DEPTH	WEIGHT
17107-303	17	4' 6" - 7' 6"	9' - 15'	11' 7"	4' 7"	10"	42 lbs
17102-303	22	5' 6" - 9' 6"	11' - 19'	15' 6"	5' 7"	10"	51 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

DARK HORSE™

300 LBS RATED | TYPE IA | CSA + ANSI COMPLIANT



Demo Video

1. MULTI-POSITION ARTICULATING HINGES

2. RAPID LOCKS™

3. NON-CONDUCTIVE, HI-VIZ GREEN FIBERGLASS
4. WIDE-FLARED BASE

5. TIP & GLIDE™ WHEELS



EXTENSION



90 DEGREE



PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	STEPLADDER MAX REACH*	EXTENSION HIGHEST STANDING LEVEL	EXTENSION MAX REACH*	STORAGE HEIGHT	SSTORAGE DEPTH	WEIGHT
16113-303	13'	1' - 2' 11"	5' 5"	3' 10" - 7' 9"	14' 3"	3' 7"	9"	31.5 lbs
16117-303	17'	1' 11" - 4' 10"	11' 4"	5' 9" - 11' 7"	18' 1"	4' 7"	9"	37.5 lbs
16122-303	22'	2' 11"-6' 8"	13' 2"	7' 10" - 15' 6"	22'	5' 7"	9"	46 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

SELECT STEP®

375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT



Demo Video

1. ACCESSORY PORTS ON TOP CAP

2. WIDE RUNGS

3. INDEPENDENTLY ADJUSTABLE OUTER SECTIONS
4. COMFORT PLATFORM

5. TIP & GLIDE™ WHEELS



ADJUSTABILITY

Easily adjusts to multiple configurations and sizes: Stepladder, 90°, Sloping Ground. With 5',6',7',8' ladders in one, no job is out of reach.



ACCESSORY PORTS + AIRDECK

Ports allow use of Little Giant AirDeck® accessory in vertical and horizontal positions. (NOT INCLUDED)



PART NUMBER	MODEL	HIGHEST STANDING LEVEL MIN-MAX	MAX REACH	SPREAD MIN-MAX	STORAGE HEIGHT	STORAGE DEPTH	WEIGHT
15130-001	5-8	2' 10" - 5' 8"	12' 4"	3' 5" - 5' 2.5"	5' 1.5"	8.5"	34 lbs
15131-001	6-10	3' 10" - 7' 7"	14' 1"	4' - 6' 5"	6' 1"	9"	41 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

MIGHTYLITE™



Demo Video

375 LBS RATED | TYPE IAA | CSA + ANSI COMPLIANT

1. VERSATILE TOP CAP
2. COMFORT PLATFORM
3. GROUND CUE®
4. SLIM STORAGE PROFILE
5. FLOATING RAIL BRACE
6. NON-CONDUCTIVE FIBERGLASS RAILS



COMFORT PLATFORM
Stand on the comfort platform for a more balanced and safe working experience.



SUPER LIGHTWEIGHT
It's right in the name. Carry your ladder, your gear and still have muscles to spare.



GROUND CUE®
An audible “click” on bottom step alerts you when you have reached the final bottom step of the ladder.



PART NUMBER	MODEL	RATING	HIGHEST STANDING LEVEL	MAX REACH*	SPREAD	STEP WIDTH	STORAGE HEIGHT	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
15404-303	4' (2 step)	1AA	1' 9.5"	8' 3.5"	2' 1.5"	3"	4' 3"	1' 8.25"	5"	15.5 lbs
15405-303	5' (3 step)	1AA	2' 8.5"	9' 2.5"	2' 8"	3"	5' 2.5"	1' 9.5"	5"	19 lbs
15406-303	6' (4 step)	1AA	3' 7.5"	10' 1.75"	3' 2"	3"	6' 3.5"	1' 10.75"	5"	22.5 lbs
15408-303	8' (6 step)	1AA	5' 6.25"	12' .25"	4' 3"	3"	8' 3"	2' 1.25"	5"	30 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH COMFORT PLATFORM 13" X 13"

A-FORCE 300™



Demo Video

300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT

1. NEXT-LEVEL TOP CAP
2. SINGLE-HANDED SPREADER STEP**
3. COMFORT GRIP CARRY HANDLE
4. NON-CONDUCTIVE FIBERGLASS RAILS
5. FIELD-REPLACABLE FEET



SINGLE-HANDED SPREADER STEP
Easy setup with built-in comfort. The patent-pending spreader step gives you four extra inches of standing room on the final standing step, as well as an easy hand hold for deployment and takedown.



NEXT-LEVEL TOP CAP
Four ports on the sides and rear of the top cap accept compatible Little Giant accessories. Add in drill bit holders, clip holsters slots for drills and tape measures, friction locks for gallon or quart cans, and a magnetic fastener tray, and you've got a full toolbelt at the top of your ladder.



PART NUMBER	MODEL	RATING	HIGHEST STANDING LEVEL	MAX REACH*	SPREAD	STEP WIDTH	STORAGE HEIGHT	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
15794-001	4'	1A	1' 11"	8' 5"	30"	3"	4'	1' 9"	7"	16.5 lbs
15796-001	6'	1A	3' 10"	10' 4"	43"	3"	6'	2'	7"	23 lbs
15798-001	8'	1A	5' 9"	12' 3"	56"	3"	8'	2' 3"	7"	32 lbs
15800-001	10'	1A	7' 8"	14' 2"	67"	3"	10'	2' 6"	7"	40 lbs
15802-001	12'	1A	9' 7"	16' 1"	80"	3"	12'	2' 1.25"	7"	49 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH ** NOT AVAILABLE ON THE 10' AND 12' MODELS.

JUMBO STEP®



Demo Video

375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

1. TOOL TRAY AND HANDRAIL

2. NON-SLIP STAIRCASE STEPS

3. SLIM PROFILE
4. NON-CONDUCTIVE FIBERGLASS

5. OVERSIZED FEET



PORTABLE STAIRCASE

Three steps to your truck bed, grab your equipment, three steps back down—all while facing forward. This step stool is a genuine portable staircase.



QUICK-RELEASE ROTATING HANDRAIL

The tool tray handrail quickly tucks away for situations when it isn't needed.



PART NUMBER	MODEL	HIGHEST STANDING LEVEL	MAX REACH*	STEP WIDTH	STORAGE DEPTH	WEIGHT
11933	3 Step	2' 2"	8' 8"	8.5"	4.5"	18 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

JUMBO STEP®



Demo Video

375 LBS RATED | TYPE IAA | CSA + ANSI COMPLIANT

1. TOOL TRAY AND HANDRAIL

2. FULL-BOXED STEPS

3. EASY LATCH TABS
4. SLIM PROFILE

5. OVERSIZED FEET



NON-SLIP STAIRCASE STEPS

Three steps to your truck bed, grab your equipment, three steps back down—all while facing forward. Ultra-wide, non-slip steps with almost no overlap make this step stool a genuine portable staircase.



SLIM PROFILE

Stop lugging a ladder to do a stool's work. The Jumbo Step is lightweight, easy to carry, and folds into a slim storage profile.



PART NUMBER	MODEL	HIGHEST STANDING LEVEL MIN-MAX	MAX REACH	STEP WIDTH	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
11902-303	2 STEP	1' 6"	7' 6"	8.5"	1' 9"	4"	11.9 lbs
11903-303	3 STEP	2' 2"	8' 8"	8.5"	1' 9"	4"	16.4 lbs



A 5' 6" PERSON WITH A 12" VERTICAL REACH

SAFETY STEP®

300 LBS RATED | TYPE IA | CSA + ANSI COMPLIANT

- 1. RUBBER PADDED NON-SLIP STEPS
- 2. SLIM PROFILE
- 3. TIP & GLIDE™ WHEELS



NON-SLIP STAIRCASE STEPS
Safe, sturdy, non-slip portable staircase.



SAFETY LOCKING HANDRAIL
Handrail keeps the ladder locked open until you release them for added security.



PART NUMBER	MODEL	HIGHEST STANDING LEVEL MAX	MAX REACH	STEP WIDTH	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
10210BA-303	2 STEP	2' 8"	9' 2"	14"	1' 10"	5"	15.5 lbs
10310BA-303	3 STEP	3' 7"	10' 1"	14"	1' 10"	5"	21.5 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH



Demo Video

SURE STEP™

375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

- 1. QUICK SETUP
- 2. FULL-BOXED STEPS
- 3. OVERSIZED, REPLACABLE FEET
- 4. COMFORTABLE TO STRADDLE*
- 5. FUNCTIONAL TOP STEP SURFACE
- 6. NON-CONDUCTIVE FIBERGLASS



STAND ON TOP
Our split top step means you have a wide platform when you're furthest from the ground. Steps are climbable on both sides and support the straddle position.*



QUICK ON ITS FEET
No hassle, no messing with latches and no pinched fingers.

PART NUMBER	MODEL	HIGHEST STANDING LEVEL	MAX REACH**	STORAGE WIDTH AT BASE	STORAGE DEPTH	WEIGHT
11953	3 Step	2' 3"	8' 9"	1' 6.5"	8"	8 lbs

* SHOES SHOULD NOT EXCEED 13" FOR OPTIMAL USE IN THIS POSITION
** A 5' 6" PERSON WITH A 12" VERTICAL REACH



Demo Video



DS-XL™

375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT



Demo Video



ROOM FOR TWO TWO-PERSON LADDER WORK FROM BOTH SIDES SIMULTANEOUSLY



The DS-XL™ is designed as a true two-person stepladder. With its wide steps, both users will feel comfortable while working on the ladder. Made with Hi-Viz Green fiberglass, the ladder is non-conductive, and the color promotes safety, as it is the most visible color to the human eye. The DS-XL meets or exceeds all OSHA and ANSI standards, and with a Type IAA rating, it is certified to hold 375 lbs on both sides. It is available in 4', 6' and 8' models.

1. RUBBER IMPACT BUMPERS

Rubber bumpers protect the ladder in transit, preventing broken components from impact.

2. EXTRA DEEP STEPS

Safe and stable comfort steps lessen fatigue during ladder usage.

3. 2 DUAL GROUND CUE®

An audible “click” on the bottom steps alert you when you have reached the bottom step of the ladder, on either side!

3. EXTRA DEEP STEPS

Safe and stable comfort steps lessen fatigue during ladder usage.

4. TIP & GLIDE™ WHEELS

Easily move the ladder across the job site with Tip & Glide™ wheels.

5. LONG LIFE FEET

The ladder’s heavy-duty feet are built to last, providing a secure foundation you can count on, with replaceable rubber pads for even longer life.

DID YOU KNOW?

The DS-XL is ultra shock-absorbing and was designed for airline use on windy tarmacs.

PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	MAX REACH*	SPREAD	STORAGE HEIGHT	STORAGE DEPTH	WEIGHT
15784-001	4'	1' 11"	8' 5"	3' 8"	4' 2"	10"	28 lbs
15786-001	6'	3' 9.5"	10' 3.5"	5'	6' 2"	10.5"	35.5 lbs
15788-001	8'	5' 8"	12' 2"	6' 5"	8' 2"	10.5"	47 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

FORTRESS™

375 LBS RATED | TYPE IAA | CSA + ANSI COMPLIANT



Demo Video



WRAP-AROUND TOOL TRAY

Keep you and your tools where you need them most, safe and by the work.



This fortress wasn’t made to keep things out—it was made to keep you in. With a large standing platform, wraparound enclosure, and auto-closing gate, the Fortress™ takes the benefits of a platform ladder and combines them with the lightweight, quick-and-easy setup of a stepladder.

1. ENCLOSED PLATFORM

The extra-large standing platform features a gated, wraparound enclosure that shuts automatically when you step in.

2. INNOVATIVE TOOL TRAY

Slots, holes, hooks, a magnetic tray, accessory slots, and a closeable container provides the ultimate work center at the top of the Fortress and serves as a safety barrier. Compatible with the Loot Box™, Strap Holder™, and future accessories.

3. GROUND CUE®

The Ground Cue® is designed with safety as a priority. Up to 20% of ladder accidents come from missing the last step on the way down. With the Ground Cue, putting weight on the bottom step makes an audible and tactile “click,” letting you know you’ve reached the final step.

4. SIMPE SETUP AND STORAGE

One movement, one person, one second—that’s all you need to handle the Fortress like a pro. Just push the platform handle to deploy or pull it to fold.



ROOMY PLATFORM

Lengthy jobs require you to stand on a rung for extended periods? The platform eliminates that foot fatigue.

PART NUMBER	MODEL	MAX REACH*	HIGHEST STANDING LEVEL MAX	FOOTPRINT	PLATFORM SIZE	STORAGE HEIGHT	STORAGE DEPTH	WEIGHT
19303-303	3'	9' 2"	2' 8"	3' 2"	1' 7"x 1' 5"	7' 3"	4.5"	29 lbs
19304-303	4'	10' 1"	3' 7"	3' 8"	1' 7"x 1' 5"	8' 3"	4.5"	33 lbs
19305-303	5'	11'	4' 6"	4' 2"	1' 7"x 1' 5"	9' 3"	4.5"	37 lbs
19306-303	6'	12'	5' 6"	4' 8"	1' 7"x 1' 5"	10' 3"	4.5"	41 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

ADJUSTABLE SAFETY CAGE®



Demo Video

375 LBS RATED | TYPE IAA | CSA + ANSI COMPLIANT

1. FULLY ENCLOSED PLATFORM WITH NET

2. NON-CONDUCTIVE FIBERGLASS

3. TIP & GLIDE™ WHEELS
4. DEPLOYABLE OUTRIGGERS

5. WHEEL LIFT™ CASTERS

6. WIDE-FLARED BASE



DEPLOYABLE OUTRIGGERS

Additional stability with deployable outriggers.



ADJUSTABLE LENGTH LEGS

Quickly adjust to staircases and other unlevel situations.



ADJUSTS TO
MULTIPLE
WORKING
HEIGHTS

PART NUMBER	MODEL	HIGHEST STANDING LEVEL MIN-MAX	MAX REACH*	SPREAD MIN-MAX	STORAGE HEIGHT	WEIGHT
18503-340**	3' - 5'	3' - 4' 11"	11' 5"	3' 9" - 5' 11"	7' 10"	102 lbs
18503-243**	3' - 5'	3' - 4' 11"	11' 5"	3' 9" - 5' 11"	7' 10"	107 lbs
18509-340	5' - 9'	4' 11" - 8' 8.5"	15' 2"	4' 11" - 8' 8.5"	9' 10"	129 lbs
18509-350	5' - 9'	4' 11" - 8' 8.5"	15' 2"	4' 11" - 8' 8.5"	9' 10"	129 lbs
18515-340	8' - 14'	7' 8.5" - 13' 5"	19' 11"	6' 8.5" - 10' 6"	12' 9"	151 lbs
18515-350	8' - 14'	7' 8.5" - 13' 5"	19' 11"	6' 8.5" - 10' 6"	12' 9"	156 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH
**PART NUMBERS WITHOUT RED MAPLE LEAF ARE ANSI COMPLIANT ONLY
AVAILABLE OPTIONS: -340 INCLUDES WHEEL LIFT AND NET, -243 AND -350 INCLUDES WHEEL LIFT AND NET, ALL TERRAIN WHEELS
BASE WIDTH: 3' 9.5"
*OUTRIGGERS NOT AVAILABLE ON 3'-5' MODELS

SAFETY CAGE®



Demo Video

375 LBS RATED | TYPE IAA | CSA + ANSI COMPLIANT

1. FULLY ENCLOSED PLATFORM

2. GROUND CUE®

3. NON-CONDUCTIVE FIBERGLASS
4. WEIGHT ACTIVATED WHEELS

5. ADJUSTABLE OUTRIGGERS



ENCLOSURE

Self-closing, one-way gates designed with ultimate safety in mind.



PLATFORM

Safely and comfortably work up high in an enclosed platform.

PART NUMBER	MODEL	COMPARABLE STEP LADDER SIZE	HIGHEST STANDING LEVEL	MAX REACH*	SPREAD	STEP WIDTH	STORAGE HEIGHT	STORAGE WIDTH AT BASE	WEIGHT
19702-303	2'	4'	1' 10"	8' 4"	2' 10"	3"	6' 6"	2' 3"	45 lbs
19704-356	4'	6'	3' 8"	10' 2"	3' 11"	3"	8' 6"	2' 11"	54 lbs
19706-356	6'	8'	5' 7"	12' 1"	5' 1"	3"	10' 6"	3' 2"	65 lbs
19708-356	8'	10'	7' 5"	13' 11"	6' 3"	3"	12' 6"	3' 5"	69 lbs
19710-356	10'	12'	9' 4"	15' 10"	7' 5"	3"	14' 7"	3' 8"	81 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH
STORAGE DEPTH: 6" PLATFORM SIZE: 18" X 22" GUARDRAIL HEIGHT: 42"



UNDERGROUND
UTILITY ACCESS™



Demo Video

375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT*


- 1. MULTIPLE CONFIGURATIONS
- 2. RAPID LOCK® FASTENERS
- 3. NARROW ACCESS



RAPID LOCKS®
Quickly adjust and fasten the different size extender sections to your ladder.



SWIVEL FEET
* Optional with -272 part numbers

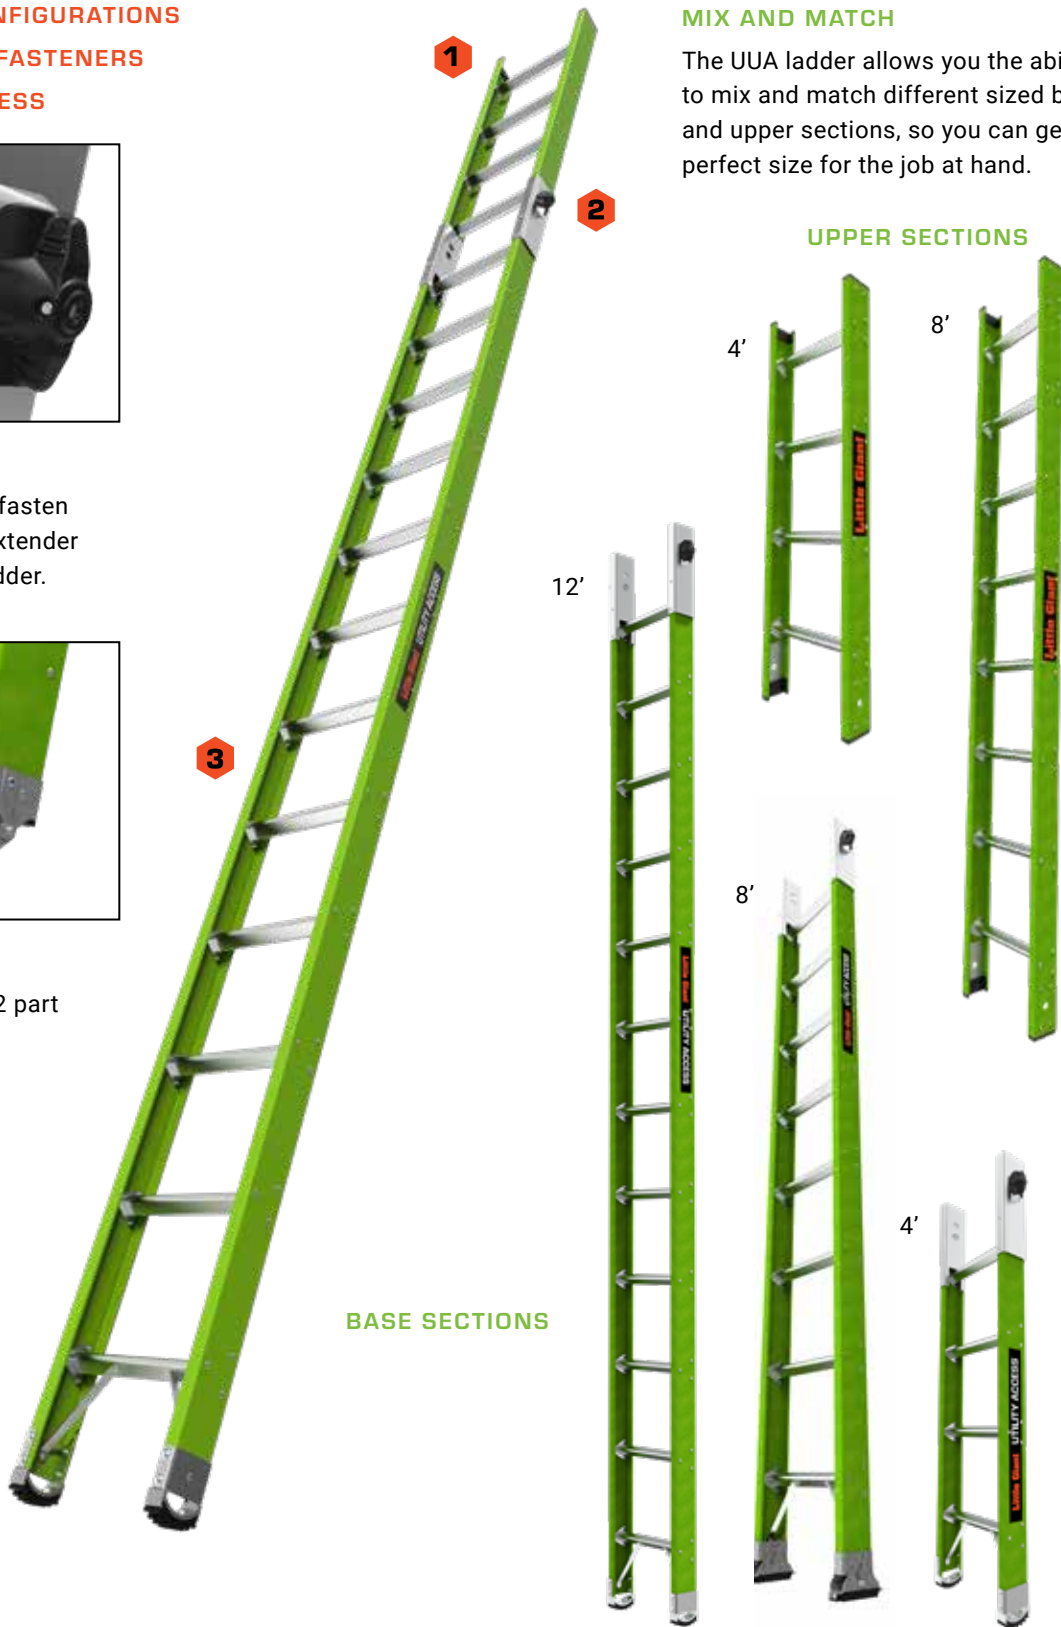

MIX AND MATCH
The UUA ladder allows you the ability to mix and match different sized bases and upper sections, so you can get the perfect size for the job at hand.

VERSATILITY IN REACHING DEPTHS
THE PERFECT LADDER FOR NARROW ACCESS POINTS



PART NUMBER	DESCRIPTION	EXTENSION LADDER SIZE	TRIANGLE RUNG WIDTH	STORAGE HEIGHT	STORAGE WIDTH	WEIGHT
18004	UNDERGROUND UTILITY ACCESS, 4' BASE ASSEMBLY, TYPE 1AA, FG LADDER	4' - 12'	1.5"	4' 8"	1' 3"	16.5 lbs
18004-272	UNDERGROUND UTILITY ACCESS, 4' BASE ASSEMBLY, TYPE 1AA, FG LADDER w/ SWIVEL FEET	4' - 12'	1.5"	4' 8"	1' 3"	16.5 lbs
18008-272	UNDERGROUND UTILITY ACCESS, 8' BASE ASSEMBLY, TYPE 1AA, FG LADDER w/ SWIVEL FEET	8' - 16'	1.5"	8' 8"	1' 3"	20 lbs
18002	UNDERGROUND UTILITY ACCESS, 12' BASE ASSEMBLY, TYPE 1AA, FG LADDER	12' - 20'	1.5"	8' 5"	1' 3"	23.5 lbs
18008-272	UNDERGROUND UTILITY ACCESS, 8' BASE ASSEMBLY, TYPE 1AA, FG LADDER w/ SWIVEL FEET	8' - 16'	1.5"	8' 8"	1' 3"	20 lbs
18002-272	UNDERGROUND UTILITY ACCESS, 12' BASE ASSEMBLY, TYPE 1AA, FG LADDER w/ SWIVEL FEET	12' - 20'	1.5"	12' 8"	1' 3"	23.5 lbs
18114	UNDERGROUND UTILITY ACCESS, 4' UPPER ASSEMBLY, FIBERGLASS ACCESSORY	Attach to Base	1.5"	4'	1' 3"	7 lbs
18118	UNDERGROUND UTILITY ACCESS, 8' UPPER ASSEMBLY, FIBERGLASS ACCESSORY	Attach to Base	1.5"	7' 11"	1' 3"	13 lbs

* SPECIAL PURPOSE LADDER. COMPLIES WITH ALL APPLICABLE OSHA AND ANSI A14 STANDARDS, EXCEPT BASE WIDTH AND RUNG SPACING.

SKYSCRAPER™


300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT



UNMATCHED HEIGHTS
The SkyScraper is designed to help you reach chandeliers, skylights and other difficult positions in rooms with high vaulted ceilings.



Demo Video

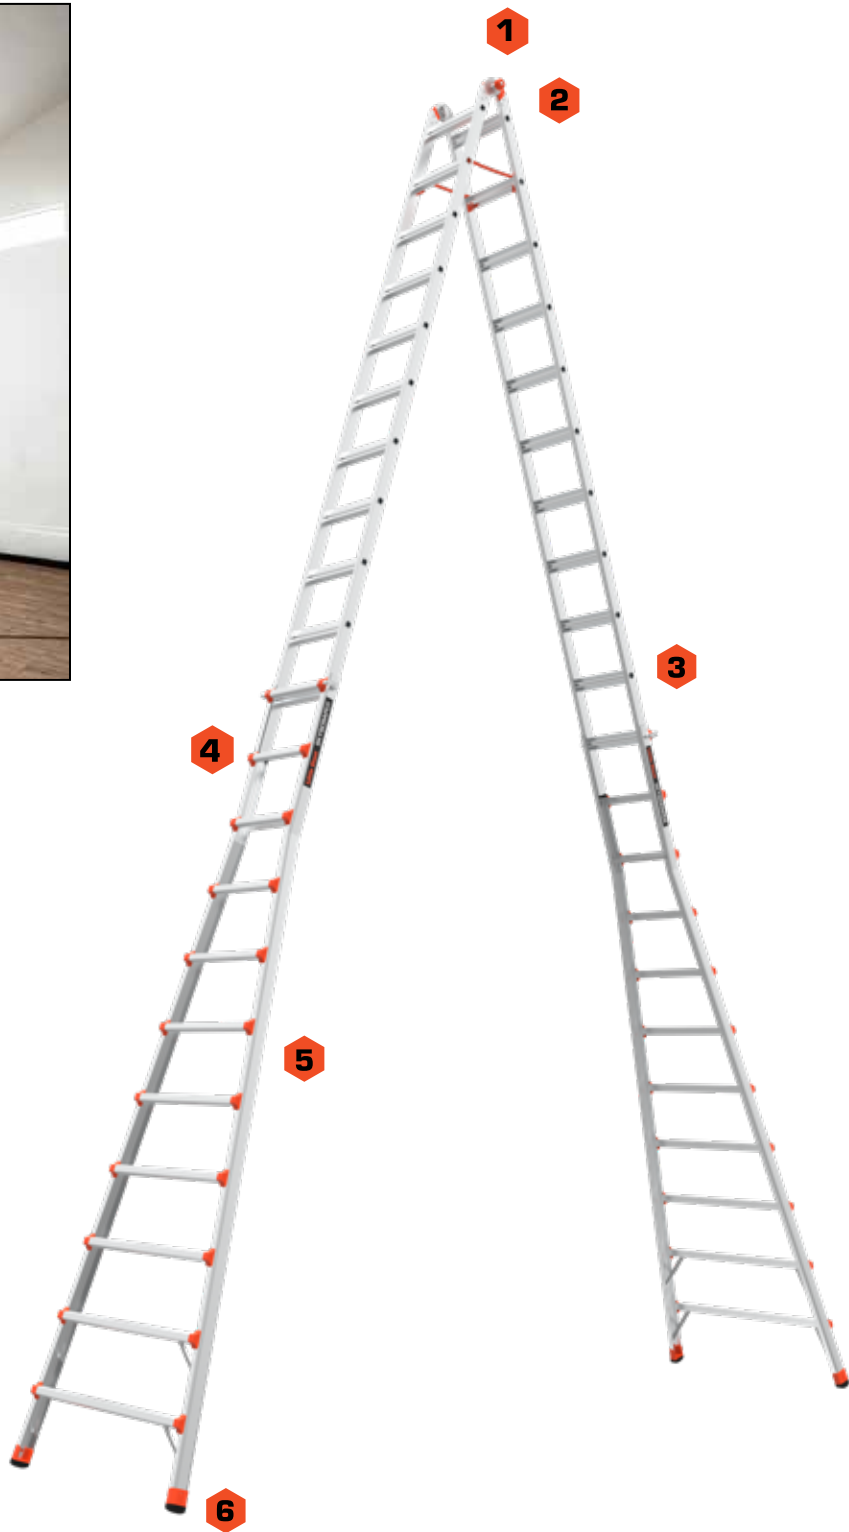

NO JOB IS OUT OF REACH

Our 15', 17', 21' models get you closer to your work in those hard-to-reach situations. 300 lbs capacity on each side of the ladder.

High-vaulted ceilings beware: there's no such thing as "hard to reach" with the Little Giant® SkyScraper™. This ladder stores at just over half its maximum extended height, making it the cheaper, simpler and more flexible alternative to a traditional lift. The SkyScraper is rated to hold 300 lbs on both sides and meets or exceeds all OSHA and ANSI standards.

1. PALM BUTTONS

Sturdy, easy-to-use palm buttons make the setup and takedown of your ladder easy.

2. SAFETY STRAPS

Safety straps help keep the ladder spread at the correct distance and promote proper use of the ladder.

3. LOCK TABS

Make fast, easy height adjustments with integrated lock tabs.

4. IDEAL FOR STAIRCASES

Articulating sides extend for safe and convenient use on staircases. Reach the task at hand without issue.

5. UNMATCHED HEIGHTS

The SkyScraper is designed to help you reach chandeliers, skylights and other difficult positions in rooms with high vaulted ceilings.

6. REPLACEABLE FEET

With time, you may need to give your ladder a tune-up. The SkyScraper has replaceable feet for a quick, simple repair.

DID YOU KNOW?

The 21' SkyScraper is the tallest double-sided stepladder on the market, allowing you to easily reach the highest tasks on any job site.

PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	STEPLADDER MAX REACH*	SPREAD	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
10109	15'	12' 3"	18' 9"	10' 10"	3' 1"	8"	71.3 lbs
10110	17'	14' 1"	20' 7"	12' 11"	3' 1"	8"	79 lbs
10121	21'	17' 11"	24' 5"	15' 3"	3' 7"	8"	102 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

ACCESSORIES



15040-001 **CARGO HOLD**



15050-001 **FUEL TANK**



10104 **WORK PLATFORM**



10170 **PLATFORM PRO**
300 lb Capacity, Accessory for Articulated Extendable Ladders



15072-001 **SADDLE BAG**
Tool bag Accessory for CAGE Elevated Enclosed Platforms



15097 **LADDER RACK**

26057-001 **AIRDECK WORKSTATION**



15044-002 **LOOT BOX**
Equipment Bucket, Combination Ladder Accessory (King Kombo 2.0 Top Cap Compatibility)



15042-002 **STRAP HOLDER**
Plumbers Stap Dispenser, Ladder Accessory (Compatibility: King Kombo 2.0 and A-Force)




15012 **PROJECT TRAY**



15038 **TOOL TRAY XL**
Two position Project Tray, Compatible with Multi-position Ladder Family



15047-002 **TOOL TRAY**
Project Tray, Compatible with Multi-position Ladder Family - Retail Packaging

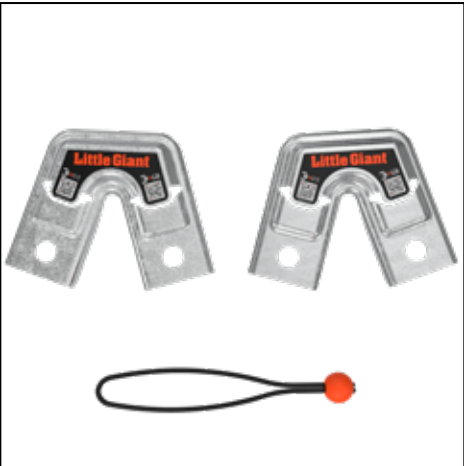

26999 **TRESTLE BRACKETS**
Rail Connectors, Articulating Ladder Accessory (Leveler Compatibility)

PLANKS

15036 PLANK

6-Foot Model, 500 lb Two Person Rated, Aluminum Ladder Accessory

15180 PLANK

8-Foot Model, 500 lb two person Rated, Aluminum Ladder Accessory

15210 PLANK

10-Foot Model, 500 lb Two Person Rated, Aluminum Ladder Accessory



PART NUMBER	MODEL	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
15036	6'	1' 3"	2.5"	14.5 lbs
15180	8'	1' 3"	2.5"	22.1 lbs
15210	10'	1' 3"	2.5"	26.6 lbs

11069 ADJUSTABLE PLANK

6-9-Foot Model, 500 lb two person Rated, Aluminum Ladder Accessory

11813 ADJUSTABLE PLANK

8-13-Foot Model, 500 lb Two Person Rated, Aluminum Ladder Accessory

11915 ADJUSTABLE PLANK


9-15-Foot Model, 500 lb two person Rated, Aluminum Ladder Accessory



PART NUMBER	MODEL	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
11069	6'-9'	1' 1"	3"	32.5 lbs
11813	8'-13'	1' 1"	3"	39 lbs
11915	9'-15'	1' 1"	3"	43.5 lbs

ACCESSORIES COMPATIBILITY CHART

PART NUMBER	DESCRIPTION	ADJUSTABLE CAGE	A-FORCE300	CONQUEST	DARK HORSE	DS-XL	FORTRESS	HYPERLITE	JUMBO STEP	KING KOMBO	MIGHTYLITE	SAFETY CAGE	SELECT STEP	SENTINEL	SKYSCRAPER	SUMOSTANCE	SURE STEP	TELECOMBO	UNDERGROUND UTILITY ACCESS
26057-001	AIRDECK WORKSTATION			•									•						
15040-001	CARGO HOLD			•	•										•				
15050-001	FUEL TANK			•	•								•		•				
15097	LADDER RACK		•	•	•				•	•	•		•			•		•	
15044-002	LOOT BOX, EQUIPMENT BUCKET		•				•			•				•					
10170	PLATFORM PRO			•	•										•				
15012	PROJECT TRAY			•	•										•				
15072-001	SADDLE BAG, TOOL BAG	•										•							
15042-002	STRAP HOLDER, PLUMBERS STAP DISPENSER		•				•			•				•					
15047-002	TOOL TRAY, INSTALLABLE PROJECT TRAY			•	•														
26999	TRESTLE BRACKETS			•	•														
10104	WORK PLATFORM			•	•										•				
11069	ADJUSTABLE PLANK, 6-9 FT			•	•												•		
11813	ADJUSTABLE PLANK, 8-13 FT			•	•												•		
11915	ADJUSTABLE PLANK, 9-15 FT			•	•												•		
15036	ADJUSTABLE PLANK, 6 FT			•	•												•		
15180	ADJUSTABLE PLANK, 8 FT			•	•												•		
15210	ADJUSTABLE PLANK, 10 FT			•	•												•		

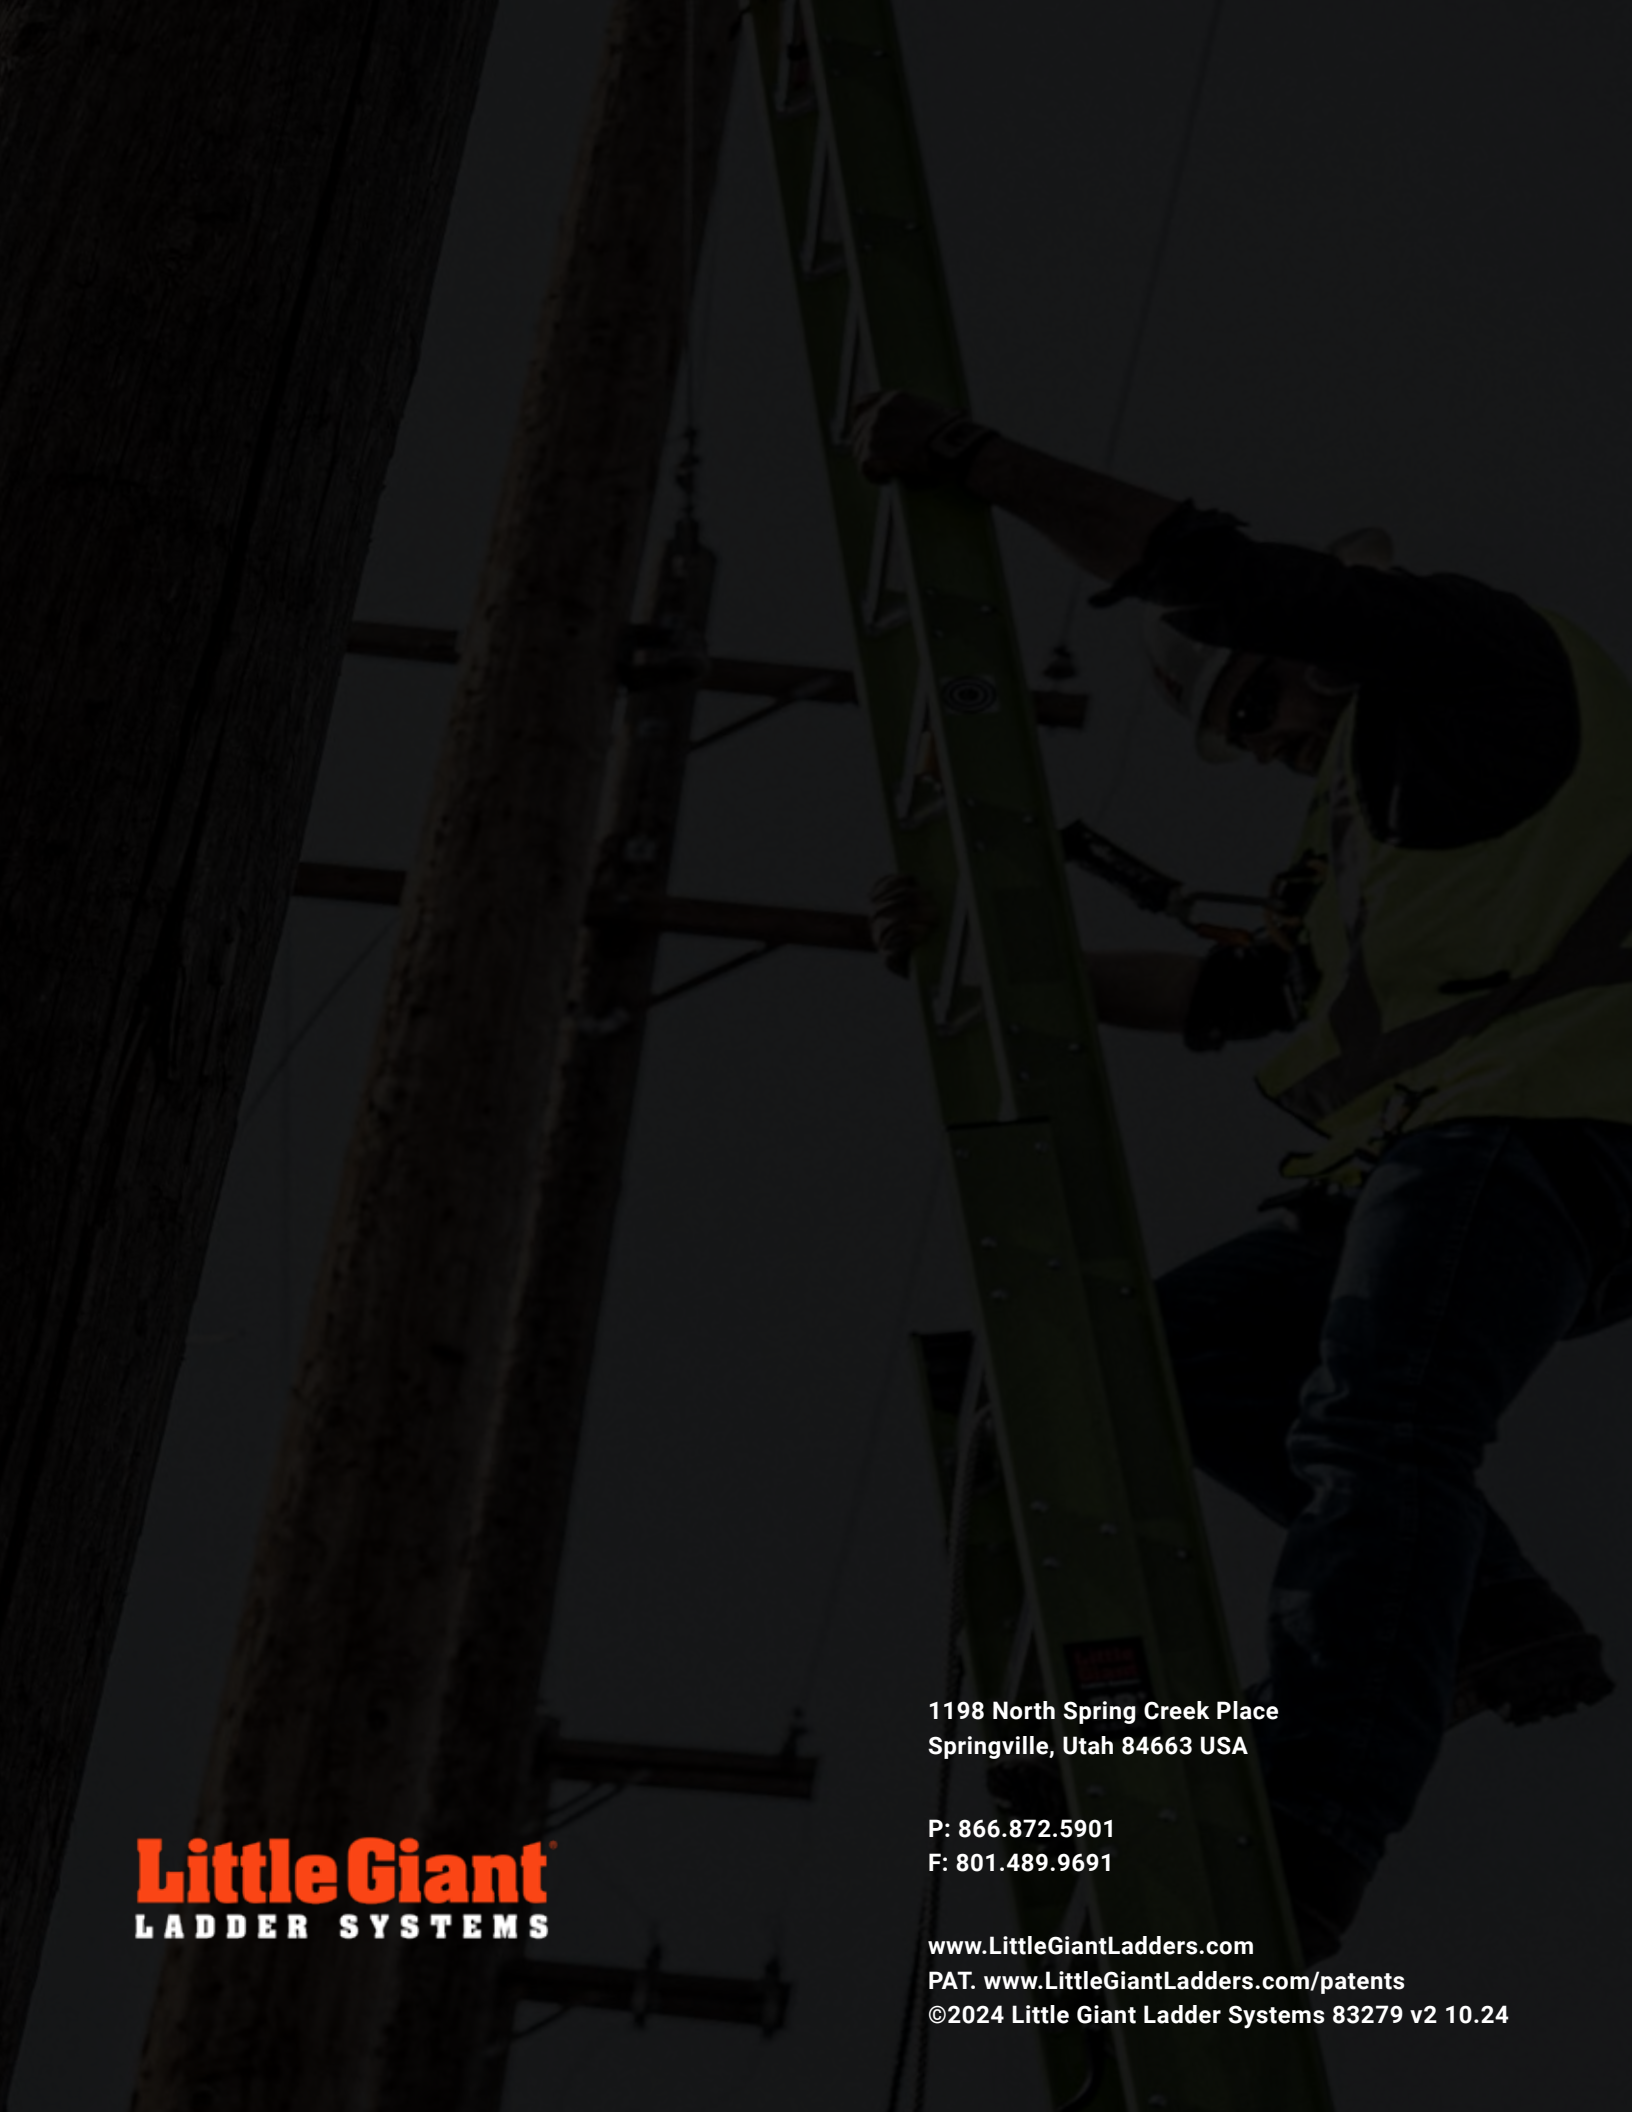

Little Giant
LADDER SYSTEMS

1198 North Spring Creek Place
Springville, Utah 84663 USA

P: 866.872.5901
F: 801.489.9691

www.LittleGiantLadders.com
PAT. www.LittleGiantLadders.com/patents
©2024 Little Giant Ladder Systems 83279 v2 10.24